



# Actinic BL TL(-K)/TL-D(-K)

## Actinic BL TL 11W/10

Tubular low-pressure mercury vapour fluorescent lamps

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Product data

General Information	
Cap base	G5 [ G5]
Main application	Insect traps
Useful life (nom.)	2000 h
Light Technical	
Colour Code	10
Colour Designation	Actinic
Chromaticity coordinate X (nom.)	230
Chromaticity coordinate Y (nom.)	230
Depreciation at 500 Hours	30 %
UV depreciation at 1,000 h	40 %
UV Depreciation at 2,000 h	45 %
Operating and Electrical	
Power (Rated) (Nom)	11.5 W
Lamp current (nom.)	0.400 A
Voltage (Nom)	34 V

Mechanical and Housing	
Bulb shape	T16
Approval and Application	
Mercury (Hg) content (nom.)	4.4 mg
UV	
UV-B/UV-A (IEC)	0.2 %
UV-A radiation 100 hours (IEC)	2.0 W
Product Data	
Full product code	871150095145827
Order product name	Actinic BL TL 11W/10
EAN/UPC – product	8711500951458
Order code	928000601030
SAP numerator – quantity per pack	1
Numerator – packs per outer box	250
SAP material	928000601030
SAP net weight (piece)	21.000 g

# Actinic BL TL(-K)/TL-D(-K)



## Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL 11W/10	16 mm	212.1 mm	219.2 mm	216.8 mm	226.3 mm

## Actinic BL TL 11W/10

## Photometric data

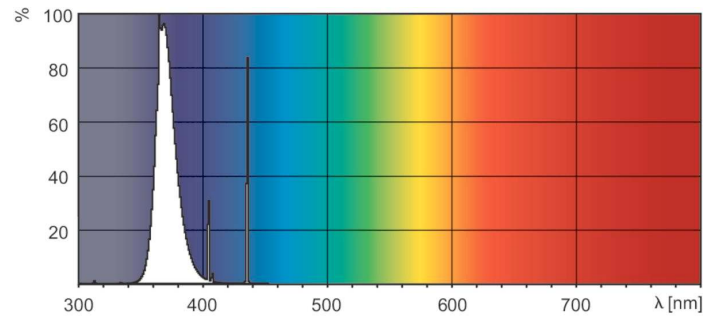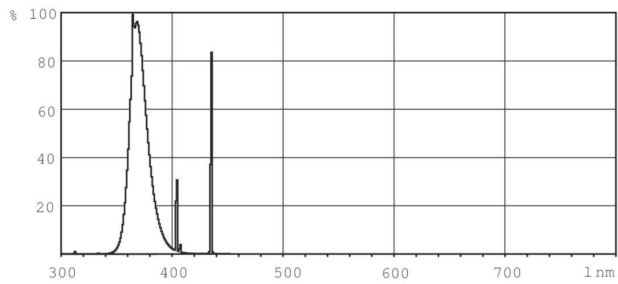

## Lightcolour /10

## Lightcolour /10

