



CDM-SA/T

CDM-SA/T 150W/942 1CT/12

CDM-SA/T – the greener way to light up the night With a high luminous efficacy producing more lumens per watt than standard Architainment lamps, the CDM-SA/T is the greener alternative to light up the night. In addition, the optimal lamp filling and short arc of the lamp create a high beam intensity and excellent colour rendering.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	G12 [G12]
Burning Position	UNIVERSAL [Any/Universal]
Main application	Dynamic Architectural
Life to 50% failures (nom.)	9000 h
Light Technical	
Colour Code	942 [CCT of 4,200 K]
Lamp Luminous Flux 25°C EL (Min)	12000 lm
Lamp Luminous Flux 25°C EL (Nom)	13000 lm
Colour Designation	Cool White (CW)
Chromaticity coordinate X (nom.)	367
Chromaticity coordinate Y (nom.)	359
Colour Temperature, horizontal (Nom)	4200 K
Lamp Luminous Efficacy EM (Nom)	84 lm/W
Colour Rendering Index,horiz (Nom)	95


Operating and Electrical	
Power (Rated) (Nom)	155.0 W
Lamp current (nom.)	1.8 A
Ignition supply voltage (min.)	198 V
Controls and Dimming	
Dimmable	No
Approval and Application	
Mercury (Hg) content (max.)	11.9 mg
Luminaire Design Requirements	
Bulb temperature (max.)	650 °C
Pinch temperature (max.)	350 °C
Product Data	
Full product code	871150020094515

CDM-SA/T

Order product name	CDM-SA/T 150W/942 1CT/12
EAN/UPC – product	8711500200945
Order code	928086605103
SAP numerator – quantity per pack	1
Numerator – packs per outer box	12

SAP material	928086605103
SAP net weight (piece)	0.030 kg



Dimensional drawing



Product	D	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
CDM-SA/T	20 mm	6	55 mm	57 mm	56	110 mm	31 mm	30	29 mm
150W/942		mm			mm		mm		
1CT/12									

CDM-SA/T 150W/942

Photometric data

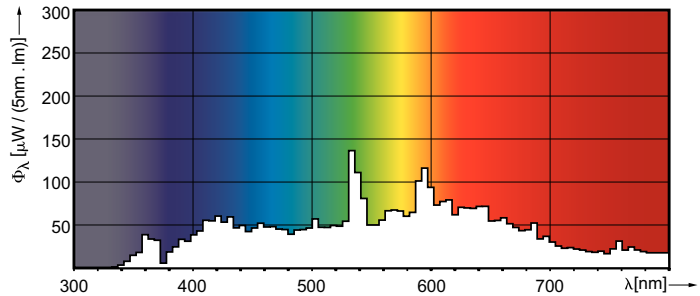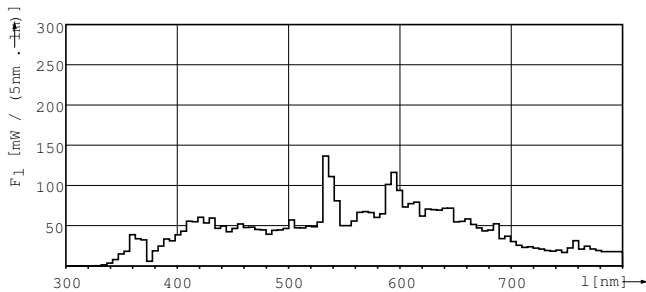

XDPB_XDCMSAT_942-Spectral power distribution B/W

