



MASTER SON-T PIA Plus

MASTER SON-T PIA Plus 400W E E40 1SL/12

High Pressure Sodium lamp with clear tubular outer bulb, high output and long reliable lifetime

Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	E40 [E40]
Burning Position	UNIVERSAL [Any/Universal]
Life to 5% failures (nom.)	20500 h
Life to 10% failures (nom.)	24000 h
Life to 20% failures (nom.)	28000 h
Life to 50% failures (nom.)	36000 h
ANSI code HID	-
System description	External Ignitor (E)
LSF 2000 h Rated	100 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	99 %
LSF 16000 h Rated	98 %
LSF 20000 h Rated	95 %

Light Technical	
Colour Code	220 [CCT of 2,000 K]
Lamp Luminous Flux (Nom)	55900 lm
Lumen maintenance 2,000 hours (min.)	95 %
Lumen maintenance 2,000 hours (nom.)	99 %
Lumen maintenance 20,000 hours	88 %
Lumen maintenance 5,000 hours (min.)	90.5 %
Lumen maintenance 5,000 hours (nom.)	96.5 %
Chromaticity coordinate X (nom.)	525
Chromaticity coordinate Y (nom.)	425
Colour Temperature, horizontal (Nom)	2000 K
Lamp Luminous Efficacy EM (Nom)	137 lm/W
Colour Rendering Index,horiz (Max)	25
LLMF 2000 h Rated	99 %
LLMF 4000 h Rated	97 %
LLMF 6000 h Rated	96 %
LLMF 8000 h Rated	94 %

MASTER SON-T PIA Plus

LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	90 %
LLMF 20000 h Rated	88 %
Ratio scotopic/photopic lumens	0.60

Operating and Electrical

Power (Rated) (Nom)	408.0 W
Lamp current (EM) (nom.)	0.441 A
Ignition supply voltage (max.)	198 V
Ignition peak voltage (max.)	2800 V
Re-ignition time (min.) (max.)	120 s
Ignition time (max.)	10 s
Voltage (Max)	115 V
Voltage (Min)	85 V
Voltage (Nom)	105 V

Controls and Dimming

Dimmable	Yes
Run-up time 90% (max.)	5 min

Mechanical and Housing

Lamp Finish	Clear
Cap-base information	na [-]

Approval and Application

Energy efficiency label (EEL)	A++
Mercury (Hg) content (nom.)	20 mg
Energy consumption kWh/1,000 hours	449 kWh


Luminaire Design Requirements

Bulb temperature (max.)	450 °C
Cap-base temperature (max.)	250 °C

Product Data

Full product code	871150017988315
Order product name	MASTER SON-T PIA Plus 400W E E40 ISL/12
EAN/UPC – product	8711500179883
Order code	928144809227
SAP numerator – quantity per pack	1
Numerator – packs per outer box	12
SAP material	928144809227
SAP net weight (piece)	0.180 kg
ILCOS code	ST-400-H/E-E40

Dimensional drawing


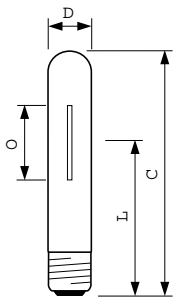


SON-T Plus 400W/220 E40

Product	D (max)	O	L	C (max)
MASTER SON-T PIA Plus 400W E E40 ISL/12	48 mm	83 mm	175 mm	279 mm


MASTER SON-T PIA Plus

Photometric data

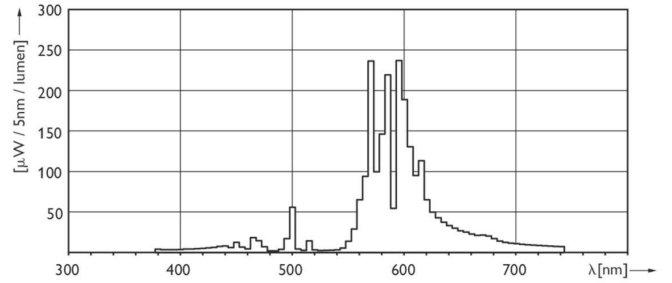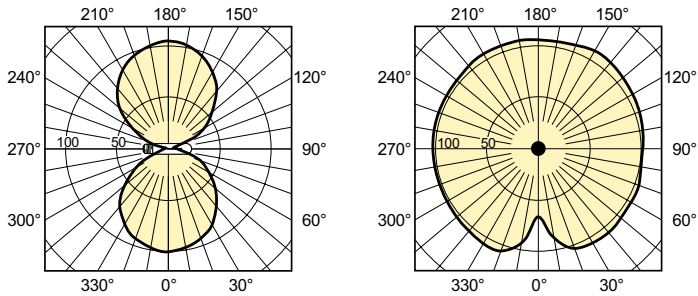


LDLD_SON-TPIA-Light distribution diagram

MASTER SON-T PIA Plus 400W

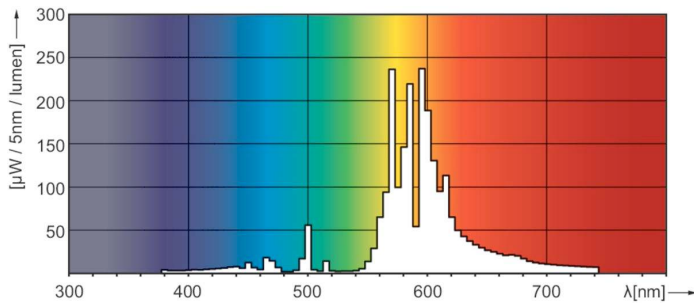


LDPO_SON-TPIA_0013-Spectral power distribution Colour

Lifetime

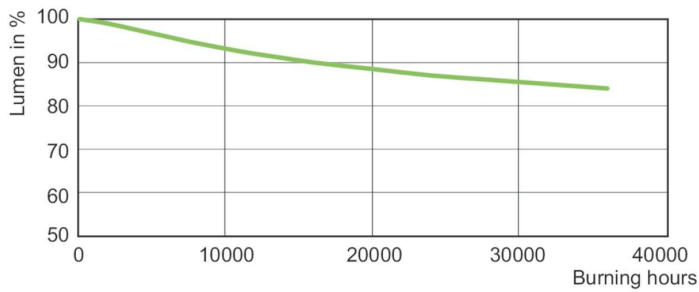

LDLM_SON-TPIA_0009-Lumen maintenance diagram

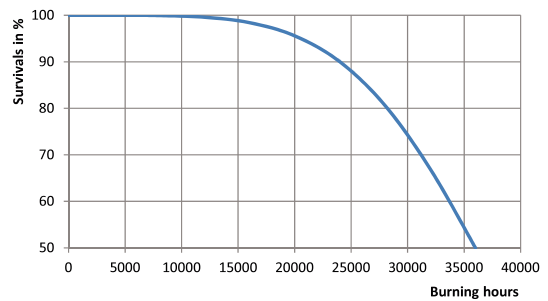

SON(-T) PIA Plus 150W 250W 400W Life Expectancy Diagram

MASTER SON-T PIA Plus

