



SON

SON 70W/220 I E27 1CT/24

High Pressure Sodium lamp with opalized ovoid outer bulb

Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information			
Cap base	E27 [E27]	Lamp Luminous Flux (Min)	5040 lm
Burning Position	UNIVERSAL [Any/Universal]	Lamp Luminous Flux (Nom)	5600 lm
Life to 5% failures (nom.)	10000 h	Lumen maintenance 10,000 hours (min.)	70 %
Life to 10% failures (nom.)	13000 h	Lumen maintenance 10,000 hours (nom.)	81 %
Life to 20% failures (nom.)	18000 h	Lumen maintenance 2,000 hours (min.)	80 %
Life to 50% failures (nom.)	28000 h	Lumen maintenance 2,000 hours (nom.)	88 %
System description	Internal Ignitor (I)	Lumen maintenance 20,000 hours	78 %
LSF 2000 h Rated	99 %	Lumen maintenance 5,000 hours (min.)	75 %
LSF 4000 h Rated	99 %	Lumen maintenance 5,000 hours (nom.)	83.5 %
LSF 6000 h Rated	98 %	Chromaticity coordinate X (nom.)	0.54
LSF 8000 h Rated	97 %	Chromaticity coordinate Y (nom.)	0.42
LSF 12000 h Rated	92 %	Colour Temperature, horizontal (Nom)	1900 K
LSF 16000 h Rated	84 %	Lamp Luminous Efficacy EM (Nom)	80 lm/W
LSF 20000 h Rated	74 %	Colour Rendering Index,horiz (Max)	25
	Sphere	Colour Rendering Index,horiz (Nom)	-
		LLMF 2000 h Rated	88 %
		LLMF 4000 h Rated	84 %
		LLMF 6000 h Rated	83 %
		LLMF 8000 h Rated	81 %
		LLMF 12000 h Rated	80 %
Light technical			
Colour Code	220 [CCT of 2,000 K]		
Lamp Luminous Flux 25°C EL (Nom)	5600 lm		

LLMF 16000 h Rated	79 %
LLMF 20000 h Rated	78 %

Operating and electrical

Power (Rated) (Nom)	71.5 W
Lamp current (EM) (nom.)	0.98 A
Ignition supply voltage (max.)	198 V
Voltage (Max)	105 V
Voltage (Min)	75 V
Voltage (Nom)	90 V

Controls and dimming

Dimmable	Yes
----------	-----

Mechanical and housing

Lamp Finish	Coated glass
Bulb shape	B70 [B 70mm]

Approval and application

Energy Efficiency Class	G
Mercury (Hg) content (max.)	16.3 mg

Mercury (Hg) content (nom.)	16.3 mg
Energy consumption kWh/1,000 hours	72 kWh
	473373


Luminaire design requirements

Bulb temperature (max.)	350 °C
Cap-base temperature (max.)	200 °C
Cap-base temperature (max.)	392 °F

Product data

Full product code	871150018186230
Order product name	SON 70W/220 I E27 1CT/24
EAN/UPC – product	8711500181862
Order code	928150108828
SAP numerator – quantity per pack	1
Numerator – packs per outer box	24
SAP material	928150108828
Net Weight (Piece)	0.065 kg
ILCOS code	SE-70-H/I-E27


Dimensional drawing




SON 70W/220 I E27 1CT/24

Product	D (max)	C (max)
SON 70W/220 I E27 1CT/24	71 mm	155 mm

Photometric data


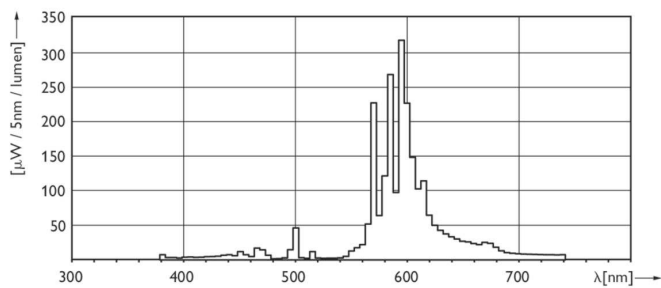


SON I 50W & 70W

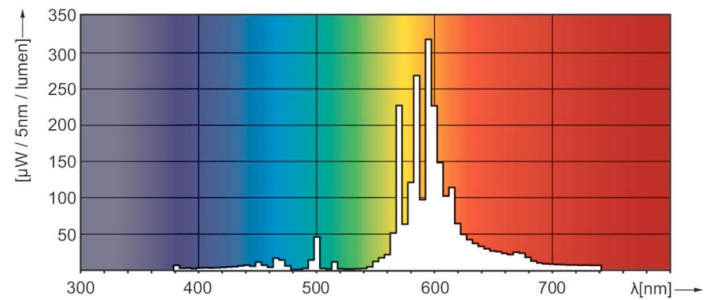

LDPO_SON-I_50W_70W-Spectral power distribution Colour

Lifetime

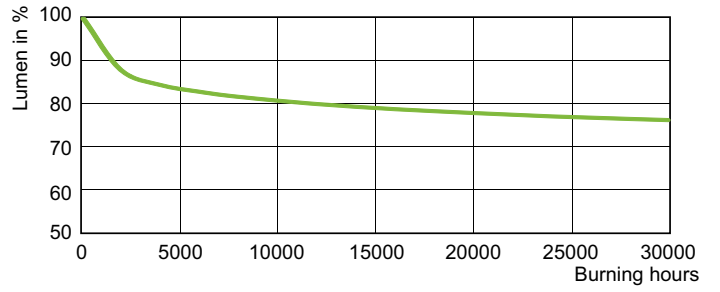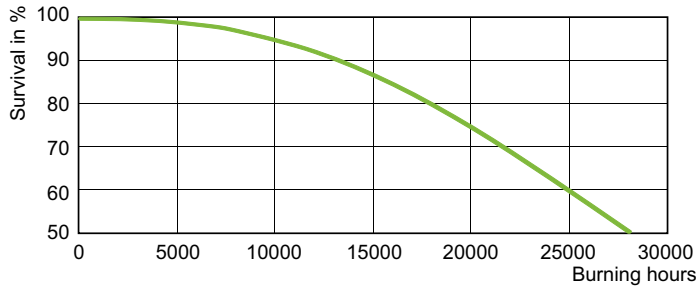

LDLE_SON-I_50W_70W-Life expectancy diagram

LDLM_SON-I_50W_70W-Lumen maintenance diagram

