



# MASTER SDW-TG Mini



## MASTER SDW-TG Mini 50W/825 GX12-1 1CT/12

Range of high-efficiency, discharge lamps with warm colour to be used in small, open luminaires designed around MASTERColour CDM-T lamps

### Warnings and Safety

- Use only with dedicated Philips control gear
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap base	GX12-1 [ GX12-1]
Burning Position	UNIVERSAL [ Any/Universal]
Life to 5% failures (nom.)	7000 h
Life to 20% failures (nom.)	9000 h
Life to 50% failures (nom.)	10000 h
ANSI code HID	-
System description	na [-] Sphere

Light Technical	
Colour Code	825 [ CCT of 2,500 K]
Lamp Luminous Flux 25°C EL (Nom)	2400 lm
Lamp Luminous Flux (Min)	2100 lm
Lamp Luminous Flux (Nom)	2400 lm
Colour Designation	Golden White
Lumen maintenance 10,000 hours (min.)	65 %

Lumen maintenance 10,000 hours (nom.)	75 %
Lumen maintenance 2,000 hours (min.)	85 %
Lumen maintenance 2,000 hours (nom.)	95 %
Lumen maintenance 5,000 hours (min.)	75 %
Lumen maintenance 5,000 hours (nom.)	85 %
Chromaticity coordinate X (nom.)	0.478
Chromaticity coordinate Y (nom.)	0.415
Colour Temperature, horizontal (Nom)	2500 K
Lamp Luminous Efficacy EM (Nom)	44 lm/W
Colour Rendering Index,horiz (Min)	80
Colour Rendering Index,horiz (Nom)	81

Operating and Electrical	
Power (Rated) (Nom)	54.0 W
Lamp current run-up (max.)	1.6 A
Ignition peak voltage (max.)	4000 V
Ignition supply voltage (min.)	205 V

# MASTER SDW-TG Mini

Re-ignition time (min.) (max.)	1.0 min
Ignition time (max.)	60 s
Voltage (Max)	90 V
Voltage (Min)	78 V
Voltage (Nom)	85 V

## Controls and Dimming

Dimmable	No
Run-up time 90% (max.)	2 min

## Mechanical and Housing

Lamp Finish	Clear
Bulb material	-
Bulb shape	T19 [ T 19mm]

## Approval and Application

Energy Efficiency Class	G
Mercury (Hg) content (max.)	5.7 mg
Mercury (Hg) content (nom.)	5.7 mg
Energy consumption kWh/1,000 hours	54 kWh

473250


## Luminaire Design Requirements

Bulb temperature (max.)	500 °C
Cap-base temperature (max.)	280 °C
Pinch temperature (max.)	350 °C

## Product Data

Full product code	871150020323615
Order product name	MASTER SDW-TG Mini 50W/825 GX12-1
	1CT/12
EAN/UPC – product	8711500203236
Order code	928159905131
SAP numerator – quantity per pack	1
Numerator – packs per outer box	12
SAP material	928159905131
SAP net weight (piece)	0.034 kg
ILCOS code	STH-50/25/1B-GX12-1


## Dimensional drawing



SDW-TG 50W/825 GX12-1

Product	D (max)	D	O	L (min)	L (max)	L	C (max)
MASTER SDW-TG	20 mm	0.75 in	14.5	53.5 mm	56.5 mm	55 mm	103 mm
Mini 50W/825			mm				
GX12-1 1CT/12							

## Photometric data

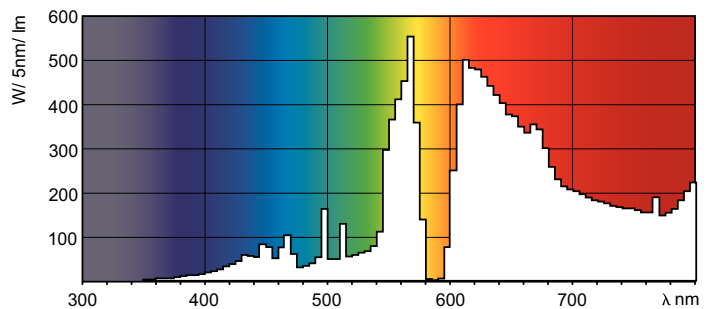


LDPO\_SDW-TG-Spectral power distribution Colour

MASTER SDW-TG

# MASTER SDW-TG Mini

## Lifetime

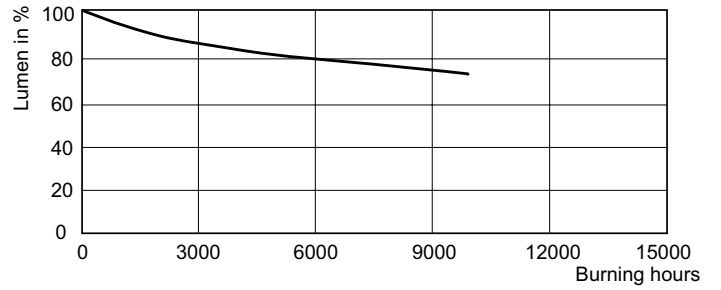

LDLM\_SDW-TG\_50W\_825-Lumen maintenance diagram

