



MSR

MSR 575/2 10H 1CT/4

MSR – bright vivid colours, always The high colour rendering index of the single ended MSR series ensures that everyone in the audience can enjoy the true colours of the scenery, the stage props, the players and their costumes – in fact everything that is on stage can be made bright and vivid in daylight quality light. Also, thanks to the single ended lamp concept, the luminaire has optimal light collection and direction possibilities to help ensure brightness on stage exactly where and when it is needed. In addition, the MSR can be used in any burning position for easy set-up and convenience.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Product data

General information		Lamp Luminous Efficacy EM (Min)		75 lm/W	
Cap base	GX9.5 [GX9.5]	Lamp Luminous Efficacy EM (Nom)		83 lm/W	
Burning Position	UNIVERSAL [Any/Universal]	Colour Rendering Index,horiz (Nom)		70	
Main application	Studio/Disco	Operating and electrical			
Life to 50% failures (nom.)	1000 h	Power (Rated) (Nom)	575 W		
System description	Cold Strike	Lamp current (nom.)	6.75 A		
Light technical		Ignition supply voltage (min.)	207 V		
Colour Code	2	Controls and dimming			
Lamp Luminous Flux 25°C EL (Min)	42750 lm	Dimmable	No		
Lamp Luminous Flux 25°C EL (Nom)	47500 lm				
Chromaticity coordinate X (nom.)	302				
Chromaticity coordinate Y (nom.)	320				
Colour Temperature, horizontal (Nom)	6990 K				

Mechanical and housing	
Cap-base information	20mm (20)
Luminaire design requirements	
Bulb temperature (max.)	700 °C
Pinch temperature (max.)	350 °C
Pinch temperature (max.)	350 °C
Product data	
Full product code	871829122127200

Order product name	MSR 575/2 10H 1CT/4
EAN/UPC – product	8718291221272
Order code	928171605115
SAP numerator – quantity per pack	1
Numerator – packs per outer box	4
SAP material	928171605115
Net Weight (Piece)	0.057 kg


Dimensional drawing




Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 575/2	30 mm	7.0	64 mm	66 mm	65	125 mm	36 mm	35	34 mm
10H 1CT/4		mm			mm			mm	

MSR 575/2 10H 1CT/4

Photometric data

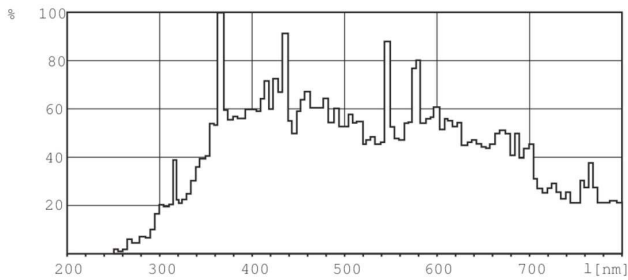

XDPB_XDMSR_CS-Spectral power distribution B/W

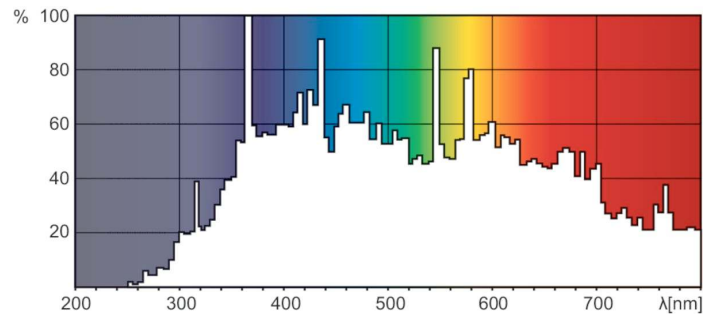

XDPO_XDMSR_CS-Spectral power distribution Colour

MSR

