



# MSR Gold™ SA Double Ended

## MSR Gold™ 1200 SA/2 DE 1CT/4

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap base	SFC10-4 [ SFC10-4]
Burning Position	UNIVERSAL [ Any/Universal]
Main application	Entertainment
Life to 50% failures (nom.)	750 h
System description	SA/2 DE
Light Technical	
Colour Code	- [ Not Specified]
Lamp Luminous Flux 25°C EL (Min)	90000 lm
Lamp Luminous Flux 25°C EL (Nom)	100000 lm
Chromaticity coordinate X (nom.)	301
Chromaticity coordinate Y (nom.)	316


Colour Temperature, horizontal (Nom)	7500 K
Lamp Luminous Efficacy EM (Min)	75 lm/W
Lamp Luminous Efficacy EM (Nom)	83 lm/W
Colour Rendering Index,horiz (Nom)	85
Operating and Electrical	
Power (Rated) (Nom)	1200 W
Lamp current (nom.)	13.6 A
Ignition supply voltage (min.)	198 V
Controls and Dimming	
Dimmable	No

# MSR Gold™ SA Double Ended

Mechanical and Housing	
Cap-base information	SFC10-4
Product Data	
Full product code	871829122107400
Order product name	MSR Gold™ 1200 SA/2 DE 1CT/4
EAN/UPC – product	8718291221074

Order code	928175305115
SAP numerator – quantity per pack	1
Numerator – packs per outer box	4
SAP material	928175305115
SAP net weight (piece)	34.000 g


## Dimensional drawing

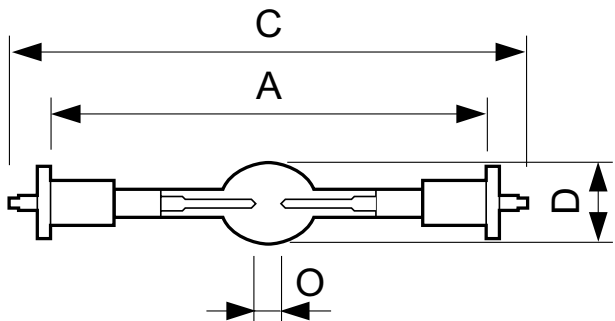


MSR GOLD 1200 SA/2 DE

Product	D (max)	O	A (min)	A (max)	A	C (max)
MSR Gold™ 1200 SA/2 DE 1CT/4	22 mm	7.0 mm	114.4 mm	115.2 mm	114.8 mm	136 mm

## Photometric data

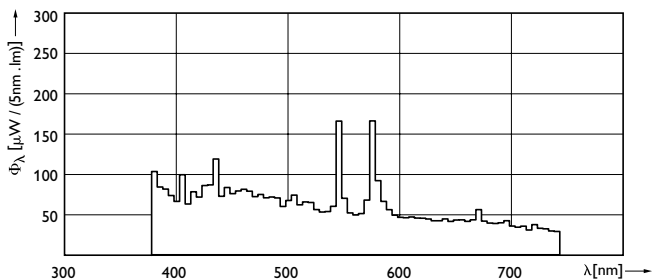

XDPB\_XDMSR\_1200W\_SA2-DE-Spectral power distribution B/W

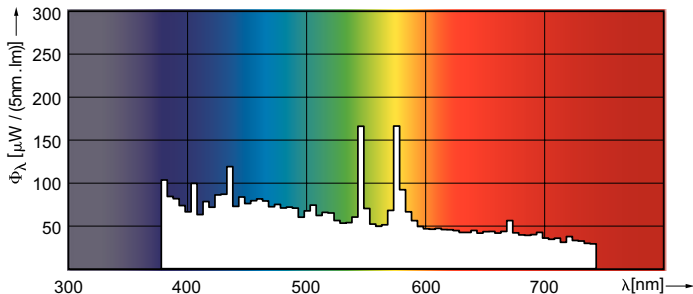

XDPO\_XDMSR\_1200W\_SA2-DE-Spectral power distribution Colour

