



# MASTERColour CDM-R111 Elite



## MASTERColour CDM-R111 Elite CDM-R111 Elite 35W/930 GX8.5 24D

MASTERColour CDM-R111 Elite combines the trendy look of 111 mm aluminium-reflector halogen lamps with the long life, high energy efficiency and crisp white light of MASTERColour CDM.

### Warnings and Safety

- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Use only with electronic control gear. 35W/930 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap base	GX8.5 [ GX8.5]
Burning Position	UNIVERSAL [ Any/Universal]
Life to 5% failures (nom.)	8000 h
Life to 10% failures (nom.)	5500 h
Life to 20% failures (nom.)	10500 h
Life to 50% failures (nom.)	12000 h
ANSI code HID	C130/O
Switching cycle	1,050X
	Narrow Cone
Light Technical	
Colour Code	930 [ CCT of 3,000 K]

Technical Beam Angle (Nom)	24 °
Beam angle technical	23 °
Beam angle technical	28 °
Beam angle technical	18 °
Lamp Luminous Flux 25°C EL (Nom)	1750 lm
Luminous intensity (min.)	6500 cd
Luminous intensity (nom.)	8500 cd
Beam description	Narrow Flood
Colour Designation	Warm white (WW)
Lumen maintenance 12,000 hours (nom.)	70 %
Lumen maintenance 2,000 hours (nom.)	90 %
Lumen maintenance 4,000 hours (nom.)	85 %
Design mean lumens	1500 lm

# MASTERCcolour CDM-R111 Elite

Chromaticity coordinate X (nom.)	0.434
Chromaticity coordinate Y (nom.)	0.398
Colour Temperature, horizontal (Nom)	3000 K
Lamp Luminous Efficacy EM (Nom)	46 lm/W
Colour Rendering Index,horiz (Min)	87
Colour Rendering Index,horiz (Nom)	90
LLMF at end of nominal lifetime (nom.)	70 %
Luminous flux in 90° cone (rated)	1750 lm

## Operating and Electrical

Power (Rated) (Nom)	39.1 W
Lamp current (EM) (nom.)	0.440 A
Re-ignition time (min.) (max.)	15 min
Warm-up time to 60% light (nom.)	120 s
Ignition time (max.)	30 s
Voltage (Max)	97 V
Voltage (Min)	81 V
Voltage (Nom)	89 V

## Controls and Dimming

Dimmable	No
Run-up time 90% (max.)	3 min

## Mechanical and Housing

Lamp Finish	Reflector
-------------	-----------

Bulb shape	R111 [ R 111mm]
------------	-----------------


## Approval and Application

Energy Efficiency Class	G
Mercury (Hg) content (max.)	4.7 mg
Mercury (Hg) content (nom.)	4.7 mg
Energy consumption kWh/1,000 hours	40 kWh
	473280

## Product Data

Full product code	871829168944700
Order product name	MASTERCcolour CDM-R111 Elite CDM-R111 Elite 35W/930 GX8.5 24D
EAN/UPC – product	8718291689447
Order code	928195405330
SAP numerator – quantity per pack	1
Numerator – packs per outer box	6
SAP material	928195405330
SAP net weight (piece)	96.000 g
ILCOS code	MRS/UB-35/930-H-GX8.5-111/88/24

## Dimensional drawing




MASTERCcolour CDM-R111 Elite CDM-R111 Elite 35W/930 GX8.5 24D

Product	D (max)	C (max)
MASTERCcolour CDM-R111 Elite CDM-R111 Elite 35W/930 GX8.5 24D	111 mm	95 mm

# MASTERCoulour CDM-R111 Elite

## Photometric data

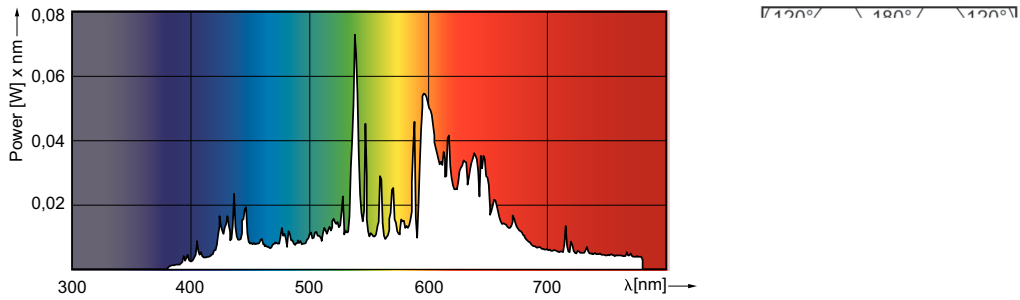

LDPO\_CDMR111E\_0001-Spectral power distribution Colour

