



MSR Short Arc

MSR 1200 SA 1CT/4

MSR Short Arc – for longer life The lamp’s short arc and compact design helps enable a compact luminaire that provides high beam intensity, while the excellent colour rendition characteristics help ensure optimal colours on stage. The highly innovative P3 technology, developed by Philips, allows MSR Short Arc lamps to be used at higher temperatures in any burning position. The result? Longer lifetime, fewer early failures and a highly consistent performance throughout the lamp’s lifetime.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Colour Rendering Index,horiz (Nom)	
Cap base	GY22 [GY22]		80
Burning Position	UNIVERSAL [Any/Universal]	Operating and Electrical	
Main application	Studio/Disco	Power (Rated) (Nom)	1200 W
Life to 50% failures (nom.)	750 h	Lamp current (nom.)	13.8 A
System description	Short Arc	Ignition supply voltage (min.)	207 V
Light Technical		Controls and Dimming	
Colour Code	- [Not Specified]	Dimmable	No
Lamp Luminous Flux 25°C EL (Min)	86400 lm	Mechanical and Housing	
Lamp Luminous Flux 25°C EL (Nom)	96000 lm	Cap-base information	na [-]
Chromaticity coordinate X (nom.)	323	Luminaire Design Requirements	
Chromaticity coordinate Y (nom.)	328	Bulb temperature (max.)	1000 °C
Colour Temperature, horizontal (Nom)	6100 K		
Lamp Luminous Efficacy EM (Nom)	80 lm/W		

MSR Short Arc

Pinch temperature (max.)	500 °C
Product Data	
Full product code	871829122125800
Order product name	MSR 1200 SA 1CT/4
EAN/UPC – product	8718291221258
Order code	928170905115

SAP numerator – quantity per pack	1
Numerator – packs per outer box	4
SAP material	928170905115
SAP net weight (piece)	0.096 kg



Dimensional drawing



MSR 1200 SA

Product	D (max)	O	L (min)	L (max)	L	C (max)
MSR 1200 SA 1CT/4	34 mm	7.0 mm	58 mm	60 mm	59 mm	135 mm

Photometric data

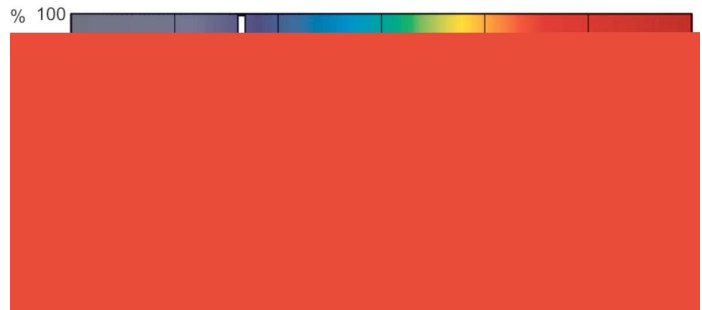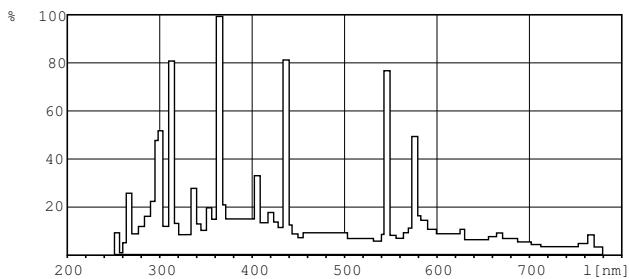

XDPB_XDMSR_SA-Spectral power distribution B/W

